



ACCU-SHEAR®



Foamed asphalt is manufactured by the introduction of precisely metered water into the flow of liquid asphalt between the A.C. pump, meter and the plants mixing zone. The water, when introduced into the A.C. immediately turns into steam gas which expands the volume of the liquids. The shear unit and the mixing action that takes place with the application of horsepower are similar to an emulsion process. The foamed asphalt more completely coats all aggregates, RAP, RAS, -200 or other materials.

By positively blending the additives with the liquid asphalt, the foaming action is **DRAMATICALLY INCREASED**. More importantly, the fusion is maintained for a longer period.



ACCU-SHEAR® Standard

- Junction Box & FRL Assembly
- Single Water Tru-Flo check Valve
- California Micro Motion Water Meter System
- Standard Mag Water Meter System
- Adjustable or Removable Base
- Safe-T-Station




ACCU-SHEAR® Advanced

- Junction Box & FRL Assembly
- Duel Water Tru-Flo check Valve
- California Micro Motion Water Meter System
- Standard Mag Water Meter System
- Adjustable or Removable Base
 - Safe-T Station
- Eco-Blend Turbulent Mixer
- Run Bypass Latex Valve



ACCU-SHEAR® Advanced PLUS

- Junction Box & FRL Assembly
- Duel Water Tru-Flo check Valve
- California Micro Motion Water Meter System
- Standard Mag Water Meter System
- Adjustable or Removable Base
 - Safe-T Station
- Eco-Blend Turbulent Mixer
- Run Bypass Latex Valve
- 4-Port Additive Manifold with Tru-Flo Valves

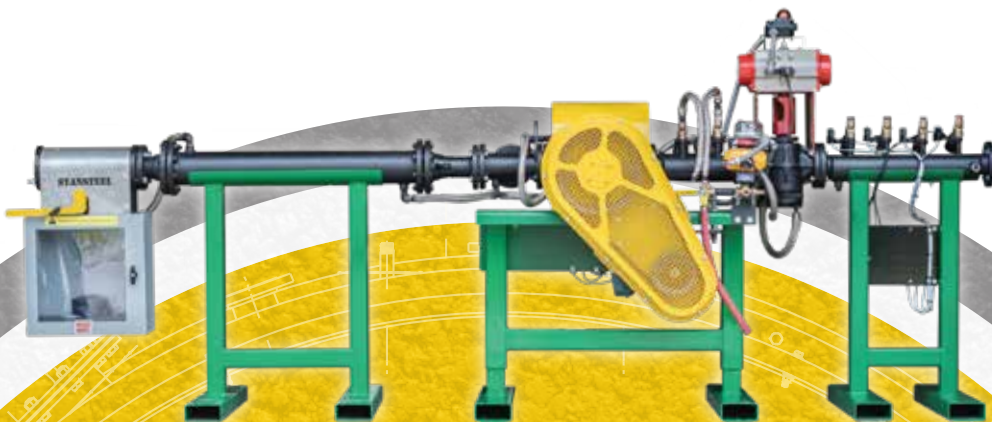

We Make Your Plant Run Better.

800-826-0223 | stansteel.com | hotmixparts.com